


PRODUCT BROCHURE



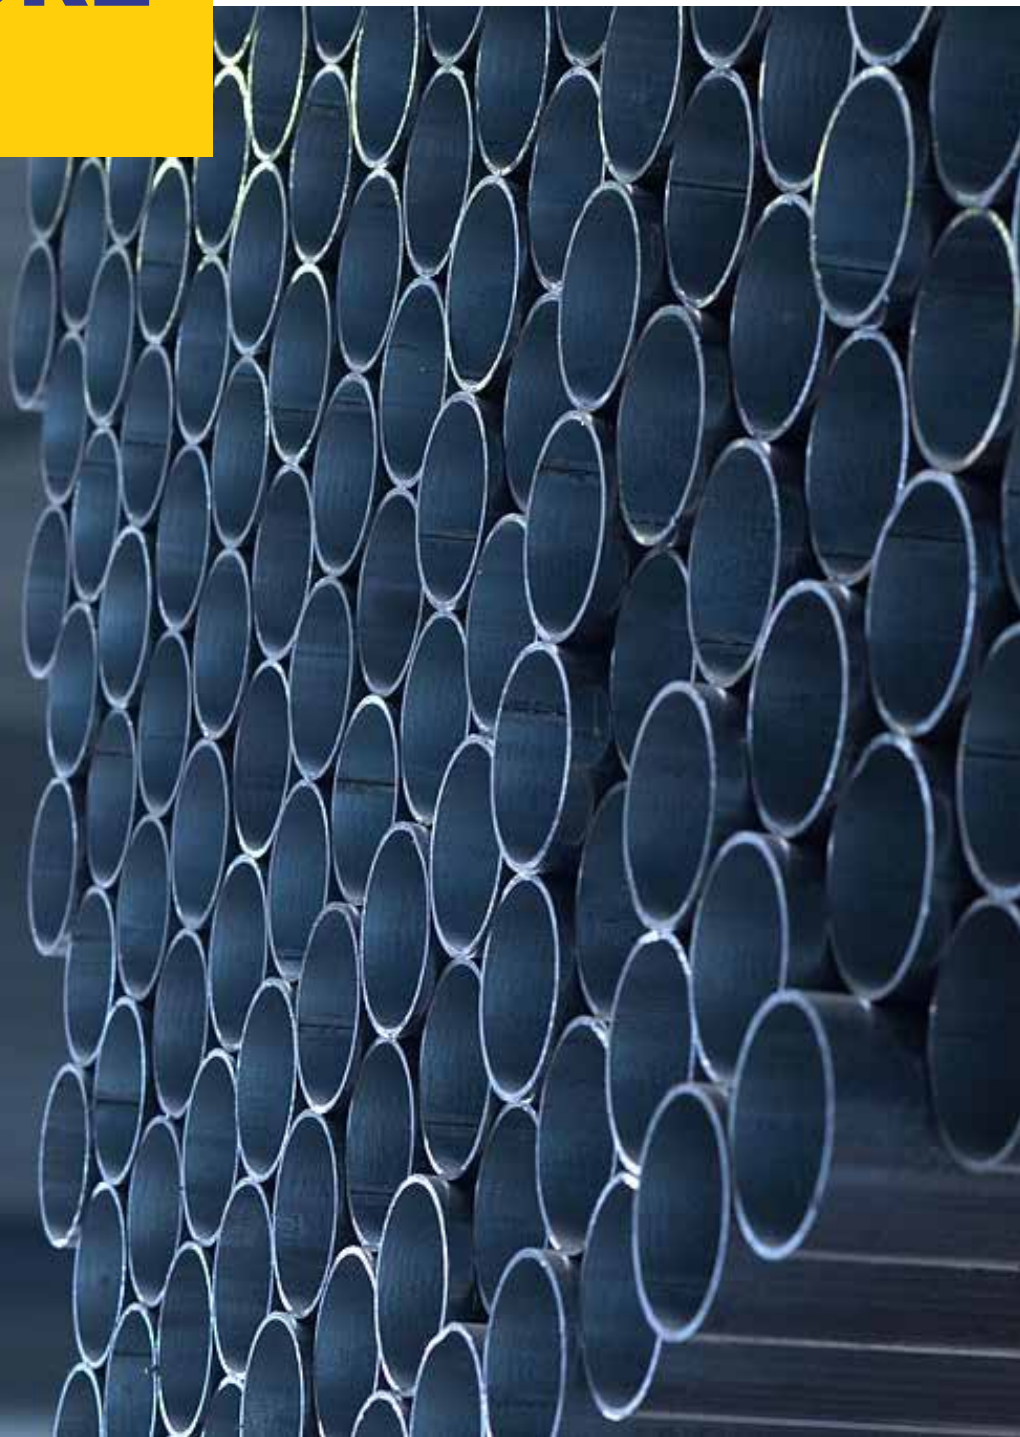

ABOUT HELA

HELA NV has been an innovative producer of temporary fencing, crush barriers and accessories since 1995. The company does the right things well: large production volumes, short turnaround times and fast delivery. Dealers and construction companies can buy their temporary fences, gates and accessories directly from the factory.

THE FIVE PLEDGES FROM HELA



High quality European product

HELA is a Belgian producer of construction fencing, crush barriers and accessories. Quality with the CE mark. You benefit from modern machinery, process streamlining and a standardised range.



Sustainable and safe production

HELA works for leading dealers in Europe and beyond. They are demanding increased sustainability and established safety procedures. CO₂ reduction and recycling are key aspects of HELA policy.



Fast and correct delivery

Short turnaround times, large volume, fast delivery – almost always from stock. Our permanent transporters are selected for complying with arrangements.



20 years of experience

Production is fully automatic. In Pelt (Belgium) a fence rolls off the belt every 30 seconds. Product quality is monitored from incoming to final inspection.



Loyal clientele

Our home markets are West and East Europe. HELA thrives in retaining its customers. This is partly due to personal contact from a slim and stable organisation.



CONSTRUCTION FENCING

A clever range of high quality fencing you can use in all confidence. Sustainable products of Sendzimir to hot-dip galvanized, produced in line with the correct standards.


PRE-GALVANISED ECO-LINE

Tubes and wires come in galvanized and are then assembled as a panel. Good fencing for purchase and sale. Light in weight, large transport volumes and competitive pricing.

POST-GALVANISED PRO-LINE

Panels are assembled first after which they are galvanized. These fences are heavier, and therefore more stable. A long life and perfect for rental purposes.


ECO-LINE FENCES

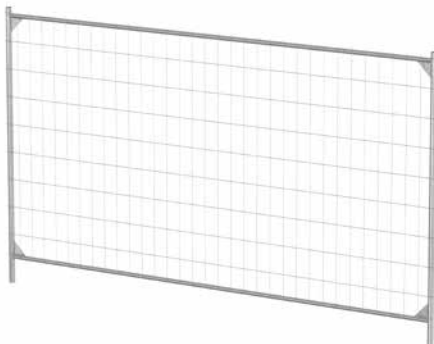

ECO-ANTI CLIMB C-BRACKETS

Narrow mesh size. Protruded wires prevent climbing over or crawling under. All corners have reinforced corner brackets giving a stronger frame.


Size	1.950 mm (H) x 3.455 mm (W)
Mesh	36 x 355 mm
Wire Thickness	2,9 x 2,4 mm
Weight	18 kg

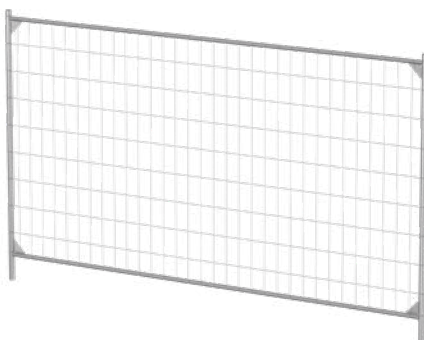

ECO-SOLID C-BRACKETS

The tubes are welded on all sides and all corners have the reinforced corner brackets. Giving the fence a stronger frame and longer service life.


Size	3.455 mm (H) x 1.950 mm (W)
Mesh	98 x 255 mm
Wire Thickness	3,8 x 2,9 mm
Weight	17,1 kg

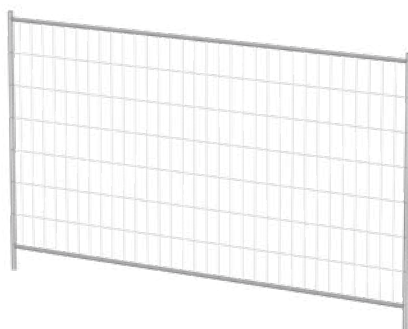

ECO-SOLID

Site fencing with fully welded frame. Good and strong. As safe as can be.


Size	1.950 mm (H) x 3.455 mm (W)
Mesh	98 x 255 mm
Wire Thickness	3,8 x 2,9 mm
Weight	16,7 kg

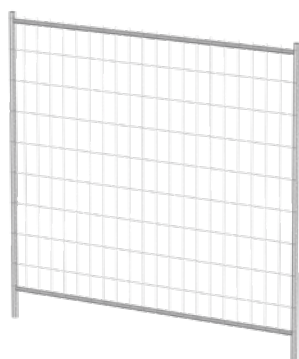

ECO-SOLID FITTING PANEL

This mobile fence is 2.2 metres wide and serves as a fitted panel for your mobile fence line.


Size	1.950 mm (H) x 2.240 mm (W)
Mesh	98 x 255 mm
Wire Thickness	3,8 x 2,9 mm
Weight	12,3 kg

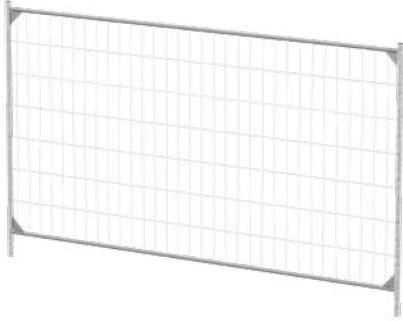

ECO-BASIC C-BRACKETS

The corners of this fence have reinforced corner brackets. They give the fence a stronger frame.


Size	1.950 mm (H) x 3.455 mm (W)
Mesh	98 x 255 mm
Wire Thickness	2,9 x 2,4 mm
Weight	13,3 kg

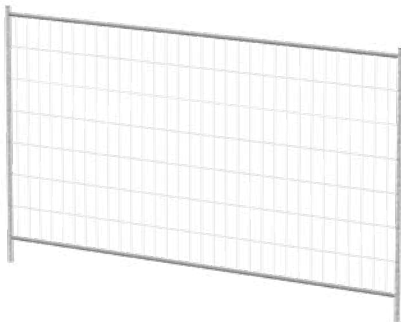

ECO-BASIC

For perimeters with low risk profile. Competitive cost price.

Size	1.950 mm (H) x 3.455 mm (W)
Mesh	98 x 255 mm
Wire Thickness	2,9 x 2,4 mm
Weight	12,9 kg

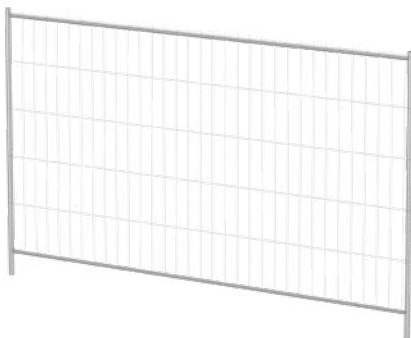


ECO-LIGHT

The entry model fence. Simple basic option.

Size	1.950 mm (H) x 3.455 mm (W)
Mesh	98 x 340 mm
Wire Thickness	2,9 x 2,4 mm
Weight	11,7 kg


PRO-LINE FENCES

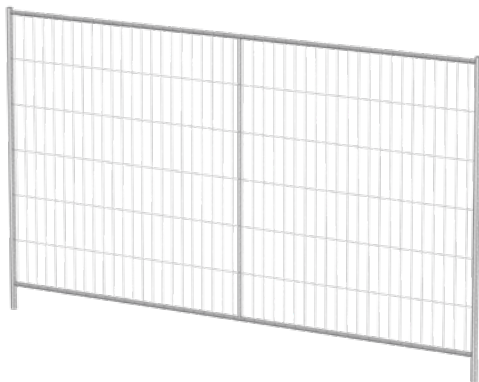

PRO-SOLID

Fencing with extra middle tube. So extra strong - also with horizontal transport.


Size	1.950 mm (H) x 3.455 mm (W)
Mesh	82 x 310 mm
Wire Thickness	3,8 x 3,8 mm
Weight	27,6 kg

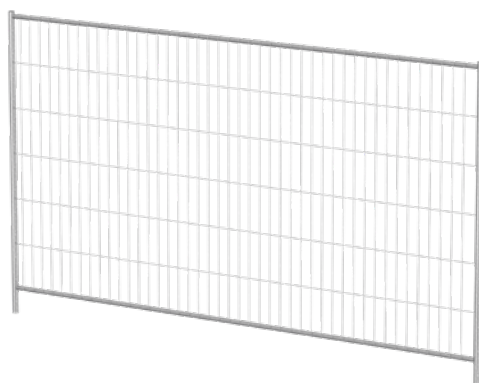

PRO-BASIC

For (rental) environments with extra requirements. With durable thermal protection.

Size	1.950 mm (H) x 3.455 mm (W)
Mesh	82 x 310 mm
Wire Thickness	3,8 x 3,8 mm
Weight	25,8 kg

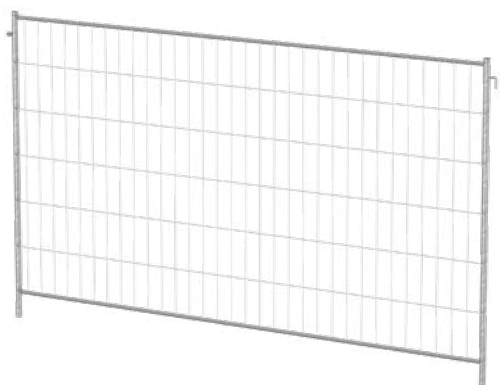


PRO-LIGHT

A good option if you are looking for a hot dipped galvanized fence. This fence provides a hook and eye connection.

Size	1.950 mm (H) x 3.455 mm (W)
Mesh	98 x 310 mm
Wire Thickness	3,8 x 2,9 mm
Weight	15,8 kg

CROWD MANAGEMENT


ECO-PEDESTRIAN FENCE

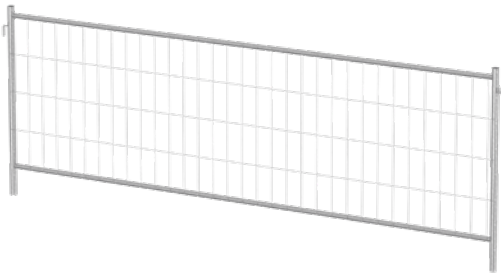

The 1 meter fence is a light, safe and multifunctional fence. You use it as a demarcation in places where overview is important or on top of other fences to create a height of 3 meters.

Size	1.195 mm (H) x 3.455 mm (W)
Mesh	98 x 310 mm
Wire Thickness	2,9 x 2,9 mm
Weight	12,9 kg


PRO-CRUSH BARRIER SOLID

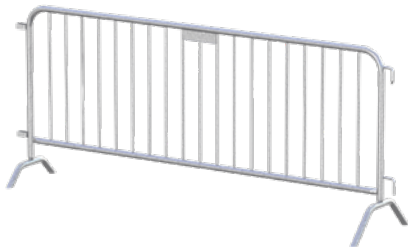

The safety of spectators during a public event is always number one priority. The robust design of the 19-bars crush barrier provides more stability.

Size	1.100 mm (H) x 2.500 mm (W)
Weight	15,8 kg
Vertical Bar no.	19


PRO-CRUSH BARRIER BASIC

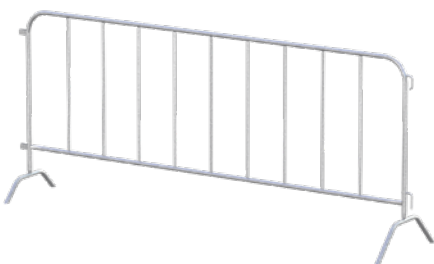

During events and when setting out courses, you can create clear demarcation lines. The 9-bars crush barrier is light and easy to use.

Size	1.100 mm (H) x 2.500 mm (W)
Weight	11,2 kg
Vertical Bar no.	9

OTHER FENCES

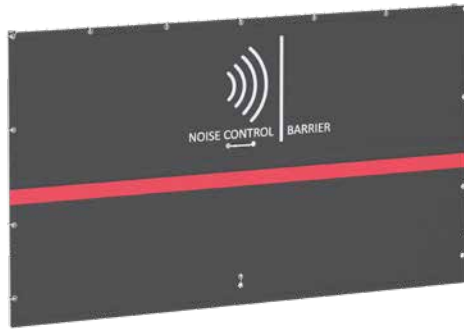


NOISE CONTROL BARRIER

A solution that keeps sound waves confined to the building site, and that is as simple as it is effective.

Size	1.950 mm (H) x 3.455 mm (W)
Weight	12,2 kg

COMBIFENCE SOLID

Combifence is standard produced in blue (RAL 5010). Mostly used in city centres.

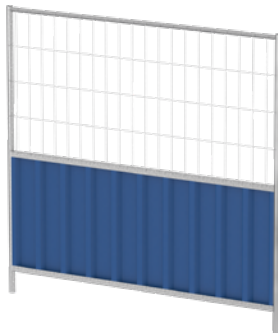

Size	1.950 mm (H) x 2.240 mm (W)
Mesh	107 x 248 mm
Wire Thickness	3,8 x 2,9 mm
Weight	20,8 kg


CITYFENCE

Obstructing views restricts theft because your valuable materials are no longer visible to criminals. (RAL 9010)



Size	1.950 mm (H) x 2.240 mm (W)
Weight	25,4 kg


GATES

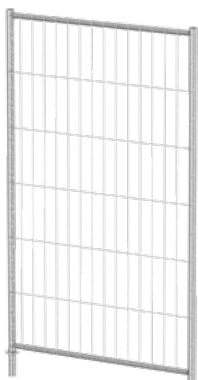

PRO-PEDESTRIAN GATE

The pedestrian gate (1.2 metres wide) can be installed in all locations. With the separately available hinge the gate turns smoothly.


Size	2.000 mm (H) x 1.180 mm (W)
Mesh	82 x 310 mm
Wire Thickness	3,9 x 3,9 mm
Weight	12,8 kg

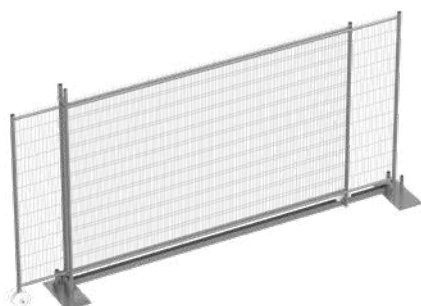

SLIDING GATE 3,5M CONSTRUCTION SET

Applicable in the existing fence line. This gate construction is practical, easy applicable and safe.

Size	2.135 mm (H) x 3.593 mm (W)
Weight	15 kg

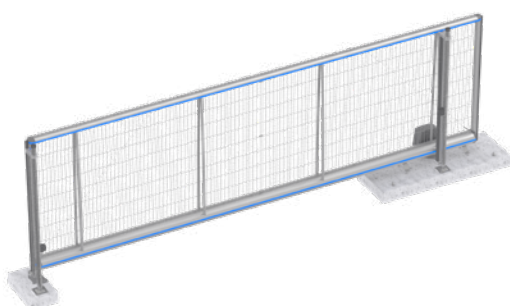

SLIDING GATE 7M

The gate is operated manual. The gate combines optimum flexibility with safety.

Size	2.000 mm (H) x 8.640 mm (W)
Mesh	50 x 200 mm
Weight	783 kg



ACCESSORIES

The basis



Concrete footing
34kg



Recycled footing
22kg



Concrete footing
25kg




Recycled footing
16kg




Steel footing flat

Extra certainty



Brace




Soilpin for brace



Steel footing for
brace



Soilpin with 2 sleeves




Brace construction



42/42 Security
coupler



42/42 High Security
coupler



Anti-lift device



Connection piece
ECO-Pedestrian fence



Mobile Fence
Bracket + Lock



Extension arm for
barbed wire Ø42



Y-shaped barbed wire
holder

Gate and foilsails



Wheel



Hingeset for
Pedestrian gate



Fencenet green 50m




Foil sail (black, white,
green, blue)

Processing



Transport rack PVC
for 28 fences vertical



Transport rack for 25
fences vertical



Transport rack for
PRO-Crush barriers



Combi Transport rack for 30
fences, footing & coupler



CONTACT

A Haltstraat 53
3900 Pelt
Belgium
T +32(0)11 64 88 03
F +32(0)11 64 41 15
E sales@hela-nv.com

WWW.HELA-NV.COM

Disclaimer. There are no rights to be derived from the technical specifications mentioned in the brochure. Always consider up to 10% tolerance deviations.

Hela NV herewith complies with NEN-EN 10305-3.